


# Agola Series Street Lighting Installation Instructions

## Product Dimensions

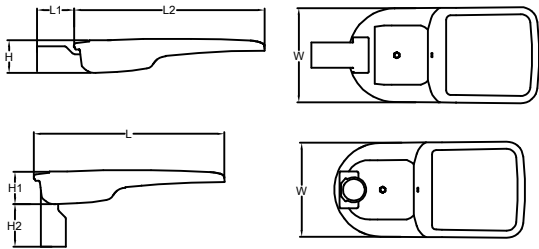

	Type1	Type2	Type3	Type4
W	210	286	286	340
H	111	102	102	113
L	432	515	615	765
L1	108	110	111	106
L2	432	515	615	765


	Type1	Type2	Type3	Type4
W	210	286	286	340
H1	111	102	102	113
H2	124	127	127	113

Cautions:

1. For outdoor use only

2. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

3. Replace any cracked protective shield.



4. Caution, risk of electric shock.

5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

6. Terminal block not included. Installation must require advice from a qualified person

When the installation height above the road is Less than 15 m, the maximum area subjected to wind: length(m)\*width(m).

Model	weight (kg)	Input Voltage	Hz	Rated Power	Working Condition
RL4550082	4.6	220V-240V~	50/60Hz	20W	CLASS II IP66 IK09 ta: -20°C ~ 50°C Relative Humidity 10%-95%
RL4550122	4.6	220V-240V~	50/60Hz	30W	
RL4550162	4.6	220V-240V~	50/60Hz	40W	
RL4550242	6.9	220V-240V~	50/60Hz	55W	
RL4550322	6.9	220V-240V~	50/60Hz	75W	
RL4550402	6.9	220V-240V~	50/60Hz	90W	

Model	weight (kg)	Input Voltage	Hz	Rated Power	Working Condition
RL4550442	6.9	220V-240V~	50/60Hz	105W	CLASS II IP66 IK09 ta: -20°C ~ 50°C Relative Humidity 10%-95%
RL4550562	8.1	220V-240V~	50/60Hz	120W	
RL4550682	8.1	220V-240V~	50/60Hz	150W	
RL4550842	10.9	220V-240V~	50/60Hz	180W	
RL4550962	10.9	220V-240V~	50/60Hz	210W	
RL45501122	10.9	220V-240V~	50/60Hz	240W	
RL4550A1122	10.9	220V-240V~	50/60Hz	280W	

## Installation Instruction

