

## Sphinx Series Projection Light

### Optical Specs

LED Light Source	3535
LED Color Temperature	1900-6500K (Options: R,G,B,Y and RGB)
Color Rendering Index	Ra>70
Light Distribution & LENS Kit	6° /15° /25° /30° /45° /120°

### Electrical Specs

Input	100-220-240V 50/60Hz or DC24V
Power Factor	>0.95
LED Driver	Inventronics/MOSO LED Driver
Dimming	W/O; DMX512
Insulation	Class I (AC input)


### Other Specs

Operating Temperature & Humidity	-40°C ~ 50°C/10~95RH
Storage Temperature	-20°C ~ 45°C
IP Classification	IP65
Housing Material	Alloy Aluminum&Tempered Glass



Model Number	Product	Nominal Power (W)	# of LEDs	Beam Angle	CCT/Color	Control System	Dimensions (mm)
FL1PA009	DC Version	18	9	5°/15°/25°/45°/60°/ 10 x 40°	1900-6500K Amber Light R,G,B,Y; RGB; RGBW	Monochrome: Without/RGB RGBW:DMX512	L150 x W140 x H157
FL1PA012		27	12				L150 x W140 x H157
FL1PA018		36	18				L203 x W180 x H197
FL1PA024		54	24				L203 x W180 x H197
FL1PA009	AC Version	18	9	5°/15°/25°/45°/60°/ 10 x 40°	1900-6500K Amber Light R,G,B,Y; RGB; RGBW	Without	L150 x W140 x H157
FL1PA012		27	12				L150 x W140 x H157
FL1PA018		36	16				L203 x W180 x H197
FL1PA024		54	24				L203 x W180 x H197

### Product Dimension

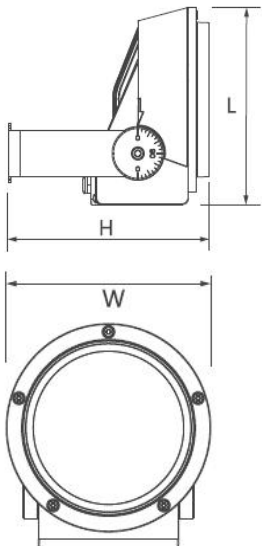

### Photometric

