

Venus Wall Pack Light

Optical Specs

LED Light Source	5050 LUMILEDS/CREE/LIGHTNING
LED Color Temperature	4000K (Options: 5000K and 3000K)
Color Rendering Index	Ra>70(Options: 80)
Light Distribution & LENS Kit	Type I or Type II or Type V

Electrical Specs

Input	100-220-240-365V 50/60Hz
Power Factor	>0.95
Surge Protection	10KV(options 20KV)
LED Driver	Philips LED Driver(Inventronics/MOSO options)
Dimming	W/O; 1-10V / DALI / Programmable / NEMA socket / Photocell
Insulation	Class I

Other Specs

Operating Temperature & Humidity	-40℃~50℃/10~95RH
Storage Temperature	-20℃~45℃
IP Classification	IP66
Housing	Die Cast Aluminum
Heatsink	Extruded Aluminum
L80 Hours @ 25℃	>93,000 hours
IK Rating	IK10




Project Photo



Model Number	Nominal Power (W)	# of Modules	Flux @ 5000K (lm)	Weight(KG)	Dimensions (mm)
RL2W3001	35	1	5,250	6.30	L264 x W352 x H192
RL2W3002	70	2	10,500	7.08	L326 x W352 x H192
RL2W3003	105	3	15,750	7.70	L388 x W352 x H192


Product Dimension

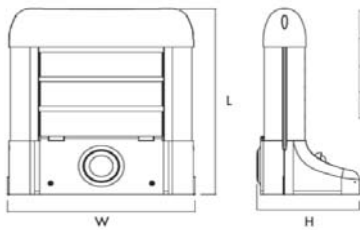


Power	L	W	H
30W	264	352	192
60W	326	352	192
90W	388	352	192

Unit: mm


Photometric

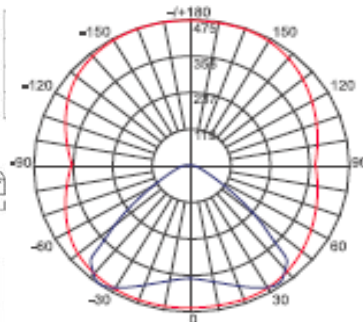

Type I

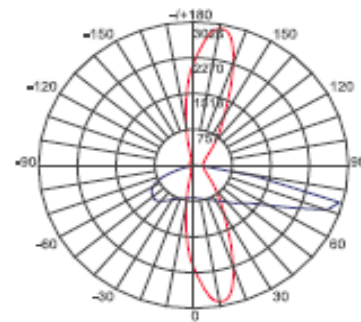

Type II

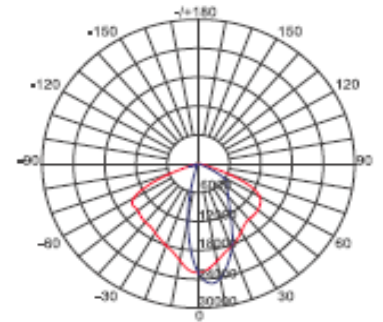

Type V